


NOBY



GRUNDFOS PUMPS FOR ALL PURPOSES

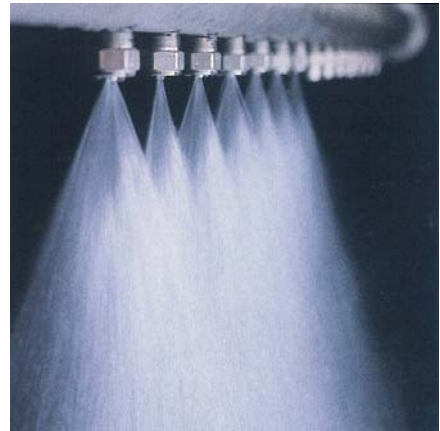


APPLICATIONS:

- Heating and Hot Water Service Systems
- Cooling and Air Conditioning Systems
- Industrial Applications
- Pressure Boosting and Liquid Transfer
- Groundwater Supply
- Domestic Water Supply
- Waste Water
- Environmental Applications



VORTIC MAGNETIC CHEMICAL PUMPS

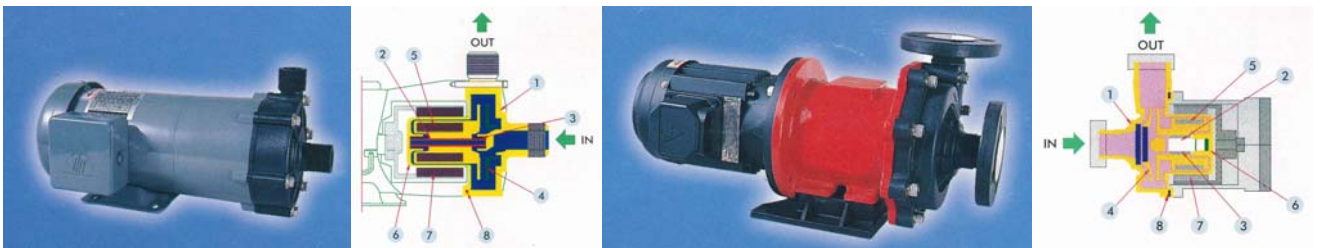

Simple Structure

- Superior combination of material and the leak-free sealless design
- Excellent corrosion resistant material such as carbon, ceramic, etc...
- Design with an emphasis on improved durability
- Excellent corrosion resistance
- Featuring enhanced reliability and safety
- The series can be arranged with NEMA or IEC standard motor
- Easy maintenance, disassembly and assembly
- Parts interchangeable with leading brand
- SIC bearing as standard material

Materials

- Front casing : GFR, GFR-PVDF
- Spindle : Ceramic, SS316
- Bearing : PTFE, SIC
- Impeller : GFR-PP, GFR-PVDF
- Magnet capsule: Ferric, NFb
- Rear Casing : GFR-PP, GFR-PVDF
- Drive Magnet : Ferric, NFb
- O-Ring : Viton, EPDM,





<p>Hydraulic Spray Nozzles Produce atomization using liquid pressure</p>	<p>Flat Spray Nozzles Provide a flat fan spray pattern with mountain-shaped or even distribution. Ideal for (high-pressure) cleaning and spraying.</p>	<p>Pneumatic Spray Nozzles Produce atomization using air and liquid pressures</p>	<p>Cone Spray Nozzles Provide a hollow cone or full cone spray pattern (or square pattern). Suitable for gas cleaning, steel plate cooling, humidifying, etc.</p>
	<p>Solid Stream Jet Nozzles Solid stream with highest spray impact. Ideal for powerful cleaning.</p>		<p>Special Purpose Nozzles Slit nozzles, air nozzles, ejector nozzles, etc.</p>
	<p>Fine Mist Nozzles Widely used pneumatic nozzles for gas cooling, moisture control, precision cleaning, etc. Mean droplet diameter: 10-100µm</p>		<p>Mist Nozzles Ideal for steel cooling and precision cleaning in Electronic industry. Mean droplet diameter: 100µm or more (semi-fine atomization)</p>
	<p>Minimal Clogging Nozzles Designed specially for spraying viscous liquid.</p>		<p>Ultra-Low Pressure Semi-Fine Mist Nozzles Utilize blower air instead of compressed air for atomizing to save installation and running cost.</p>
	<p>Steam Driving Nozzles Innovative pneumatic nozzles using steam instead of compressed air for atomizing.</p>		



SPRAYING/CLEANING



COOLING



HUMIDIFIER



DUST SUSPENION





MOISTURE CONTROL




GAS COOLING

ARO DIAPHRAGM PUMPS

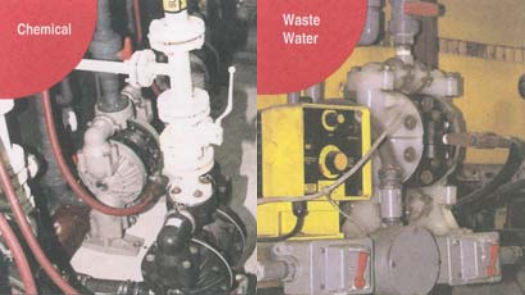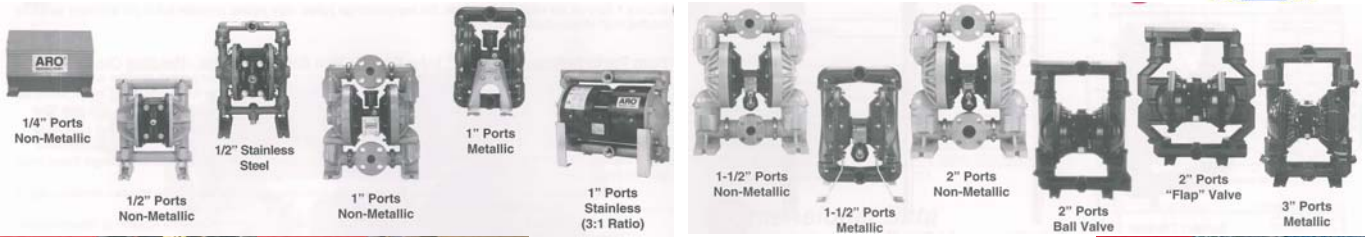

Applications:

- Tanker, Truck, Unloading
- Waste Water Treatment
- Fluid Filtration
- Basic Transfer, Supply, Packing, Filling
- Batching, Blending
- System Flush
- Recirculation, Reclamation

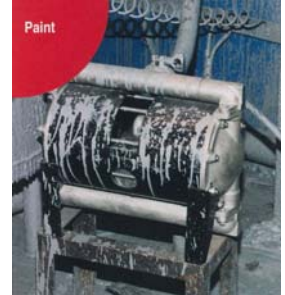

CRELEC BLOWERS



SAFE PRESSURE GAUGES, MACHINERY SWITCH & THERMOMETER

Dial Diameter: 2", 2-1/2", 4", 6"
 Pressure Range: -76cmHg ~ 0 ~ 1000kg/mc2
 Casing & Bezel: SS304, EPDM Surface, Anti-Shock PP, PVDF, Black Paint, Chrome
 Diaphragm: PP, PVDF, Teflon, Viton
 Capsule: PP, Teflon, Viton
 Bourdon Tube: Brass, Phosphor Bronze, SS316
 Filling: 99.5% Glycerin or 1000# Silicone Oil
 Connection: 1/8", 1/4", 3/8", 1/2", PT, NPT, BSPT, PF
 Accuracy: +/- 1.5% FSD



OTHERS





NOBY PTE LTD
 13, Kaki Bukit Raod 4, #01-28, Bartley Biz Centre
 Singapore 417807. Tel: +65 98330808
 Website: <http://www.noby.com.sg>
 Email: sales@noby.com.sg